Datasheet

intact Start-Power Truck

Closed calcium or hybrid battery (Ca/Ca or Sb/Ca) | low/maintenance-free

Art.No.

63543GUG

Volt	12V
Capacity	135 Ah (c20)
CCR -18°C (EN)	1000 A (EN)
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	514 x 175 x 210 mm
Weight	34,9 kg
Pos. of Terminal	**3**
Terminal	**1**
Base plate	**B13**

Usage

Top performance at a good price

Developed for performance and extreme high-current capability at an absolutely perfect price-performance ratio. For almost all standard trucks without many additional installations and other electrical consumers. Our recommendation for standard applications with low requirements and the best price-performance ratio.

- **Powerful and reliable.**
- **Double lid for increased leakage protection and gas condensation**(gaseous electrolyte condenses in the labyrinth lid and remains in the circuit).
- **Maintenance-free. No refilling of water necessary.**
- **Filled and charged (GUG), ready for immediate use.**
- Available for **trucks as a conventional wet starter battery**, as well as **super heavy duty (SHD)** with glass fiber fleece separators **vibration-resistant V3**.
- **30% more cycles** compared to conventional commercial vehicle batteries.

Size



Pos. of Terminal 3



Terminal 1

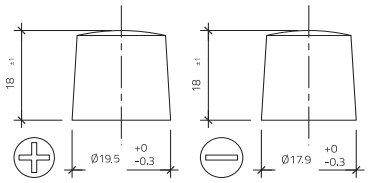

Base plate B13

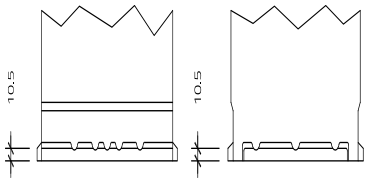

As of 03.09.2025

KECKEISEN AKKUMULATOREN
Stefan Keckeisen
Akkumulatoren e.K.
Europastraße 9
87700 Memmingen
Fon +49 (0) 8331 94444-0
Fax +49 (0) 8331 94444-9
info@intact-batterien.de
www.intact-batterien.de