

## Specification

Nominal Voltage	6V	
Nominal Capacity(20HR)	7.0AH	
Dimensions	Length	151±2mm (5.94 inches)
	Width	34±1mm (1.34 inches)
	Container Height	94±1mm (3.70 inches)
	Total Height (with Terminal)	100±2mm (3.94 inches)
Approx Weight	Approx 1.26 kg (2.78lbs)	
Terminal	T1	
Container Material	ABS	
Rated Capacity	7.50 AH/0.375A	(20hr , 1.80V/cell,25°C/77°F)
	6.98 AH/0.698A	(10hr, 1.80V/cell,25°C/77°F)
	6.40 AH/1.28A	(5hr, 1.75V/cell,25°C/77°F)
	5.73 AH/1.91A	(3hr, 1.75V/cell,25°C/77°F)
	4.71 AH/4.71A	(1hr, 1.60V/cell,25°C/77°F)
Max. Discharge Current	112.5A (5s)	
Internal Resistance	Approx 15mΩ	
Operating Temp.Range	Discharge	-15~50°C (5~122°F)
	Charge	0~40°C (32~104°F)
	Storage	-15~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 2.1A.Voltage	
	7.2V~7.5V at 25°C(77°F)Temp. Coefficient -15mV/°C	
Standby Use	No limit on Initial Charging Current Voltage	
	6.75V~6.9V at 25°C(77°F)Temp. Coefficient -10mV/°C	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	General purpose batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	
Life expectancy	3~5 years at 25°C with charge voltage of 2.25V/cell	



## Applications

- ◆ All purpose
- ◆ Uninterruptable Power Supply (UPS)
- ◆ Electric Power System (EPS)
- ◆ Emergency backup power supply
- ◆ Emergency light
- ◆ Railway signal
- ◆ Aircraft signal
- ◆ Alarm and security system
- ◆ Electronic apparatus and equipment
- ◆ Communication power supply
- ◆ DC power supply
- ◆ Auto control system



Conform to:  
IEC60896-21&22 and/or IEC61427

### Constant Current Discharge (Amperes) at 25°C (77°F)



F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	13.3	8.86	7.31	6.43	5.26	4.11	3.40	2.09	1.57	1.29	1.10	0.951	0.756	0.631	0.347
1.80V/cell	16.0	10.6	8.60	7.35	5.88	4.51	3.68	2.24	1.68	1.38	1.15	0.993	0.784	0.651	0.350
1.75V/cell	19.2	12.2	9.55	8.13	6.30	4.83	3.89	2.33	1.74	1.41	1.19	1.02	0.805	0.667	0.354
1.70V/cell	22.2	13.6	10.53	8.80	6.72	5.06	4.06	2.42	1.78	1.44	1.21	1.04	0.817	0.678	0.360
1.65V/cell	24.5	14.7	11.28	9.43	7.07	5.28	4.20	2.49	1.83	1.48	1.24	1.06	0.830	0.686	0.365
1.60V/cell	27.0	16.0	12.12	9.95	7.45	5.50	4.37	2.56	1.87	1.52	1.27	1.09	0.848	0.698	0.367

### Constant Power Discharge (Watts/cell) at 25°C (77°F)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	24.9	16.6	13.7	12.1	10.0	7.88	6.57	4.06	3.07	2.53	2.15	1.87	1.49	1.25	0.686
1.80V/cell	28.9	19.5	15.9	13.8	11.1	8.58	7.06	4.32	3.26	2.67	2.25	1.94	1.54	1.29	0.692
1.75V/cell	34.3	22.1	17.5	15.1	11.8	9.14	7.43	4.49	3.35	2.73	2.31	1.99	1.58	1.32	0.698
1.70V/cell	39.2	24.3	19.1	16.2	12.5	9.52	7.73	4.63	3.43	2.79	2.35	2.03	1.60	1.34	0.710
1.65V/cell	42.6	26.0	20.2	17.2	13.1	9.88	7.95	4.76	3.51	2.85	2.40	2.07	1.63	1.35	0.719
1.60V/cell	46.2	27.7	21.4	17.8	13.6	10.2	8.21	4.86	3.58	2.91	2.44	2.11	1.66	1.37	0.722

# Dimensions


## T1 Terminal Unit: mm [inches]

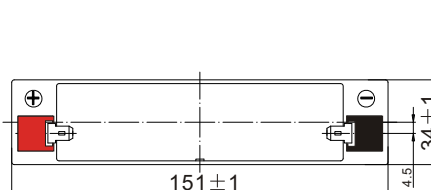


## Discharge Characteristics

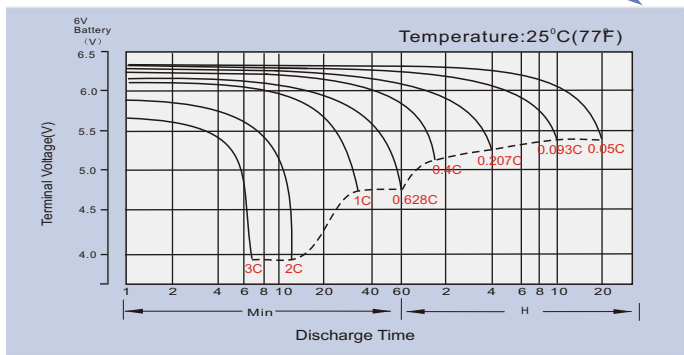


## Float Charging Characteristics

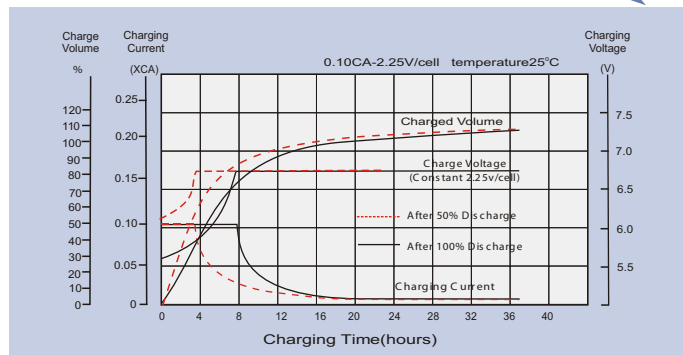


## Temperature Effects in Relation to Battery Capacity

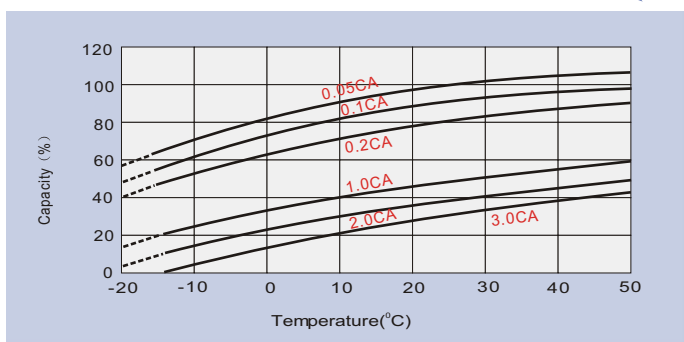


## Effect of Temperature on Long Term Float Life

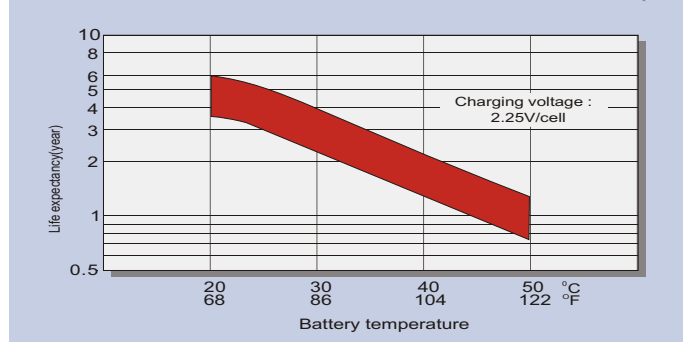

## Cycle Life in Relation to Depth of Discharge

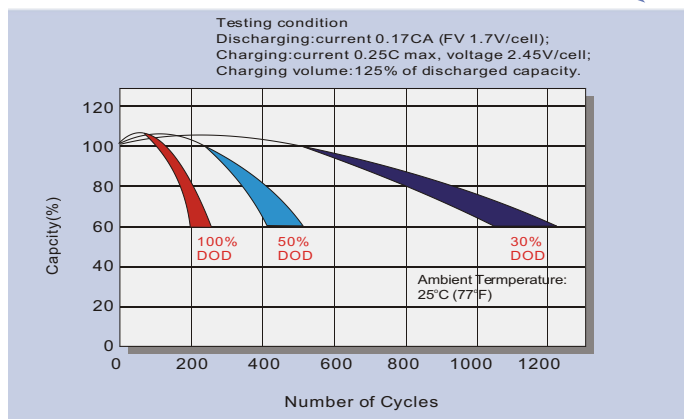

## Self Discharge Characteristics

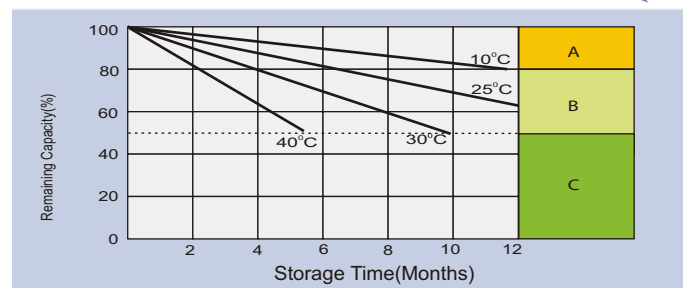

- A** No supplementary charge required (Carry out supplementary charge before use if 100% capacity is required).
- B** Supplementary charge required before use. Optimal charging may be slow:  
1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.  
2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.  
3. Charged for 8 ~ 10 hours at limited current 0.05 CA.
- C** Supplementary charge may often fail to recover the capacity. The battery should never be left standing until this is reached.