



Exide Start-Stop AGM

Sealed maintenance-free AGM battery | electrolyte absorbed in glass fibre mats | wet charged

Art.No.

EK720

Volt	12V
Capacity	72 Ah (c20)
CCR -18°C (EN)	760 A (EN)
Electrolyte	diluted sulphuric acid 1,28 +/- 0,01 Kg/l (25° C)
Electrolyte density	
Size (LxWxH)	278 x 175 x 190 mm
Weight	20,6 kg
Pos. of Terminal	0
Terminal	1
Base plate	B13



Usage




Start. Stop. Continue charging.

Enables a high number of engine starts and supplies all consumers when the motor stops. Perfect for taxis, medium and high-end cars, SUVs and trucks with start-stop systems and micro-hybrids with energy recovery.

- » **Excellent starting characteristics** even at low charge level.
- » **Higher cycle resistance and cold start performance** than standard starter battery of same case size. **Therefore longer life expectancy.**
- » **Fantastic recharging characteristics in the partial charge range.**
- » **Also for vehicles with high energy requirements and/or a lot of additional equipment.**
- » **Double lid with safety valve (VRLA),** gas recombination and backfire protection. Leak-proof.


Size



Pos. of Terminal 0



Terminal 1

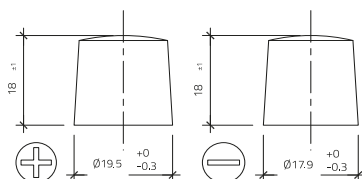

Base plate B13



As of 04.09.2025