

Optima Yellowtop

Sealed maintenance-free pure-lead spiral-cell battery | electrolyte absorbed (AGM)

Art.No.

YTS-4.2L

| | |
|---------------------|----------------------------|
| Volt | 12V |
| Capacity | 55 Ah (c20) |
| CCR -18°C (EN) | 765 A (EN) |
| Electrolyte | diluted sulphuric acid |
| Electrolyte density | 1,28 +/- 0,01 Kg/l (25° C) |
| Size (LxWxH) | 254 x 175 x 200 mm |
| Weight | 19,6 kg |
| Pos. of Terminal | 1 |
| Terminal | 1 |
| Base plate | B13 |

Usage




Long-term stable performance


Particularly long-life battery that supplies consuming loads and small vehicles with a stable voltage characteristic during the entire discharge process. Our recommendation for anyone looking for a spill-proof, high-performance battery that can handle propulsion, powering and also starting.

- » **Pressed, wound plates** for reduced loss of active material and slower aging. Vibration-resistant.
- » **For medium cycle requirements.** Approx. 300 cycles at a discharge depth of up to 80%.
- » **Consistent performance quality throughout the discharge process.**
- » **Short charging times.**
- » **Larger plate surface area and reduced plate spacing** than grid plate batteries of the same case size **for higher performance.**
- » **6-volt and 12-volt versions.**


Size




Pos. of Terminal 1



Terminal 1

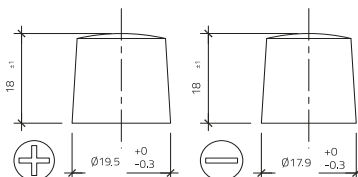

Base plate B13

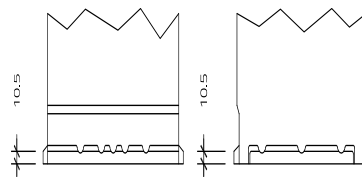

As of 01.09.2025