

# Optima Yellowtop

Sealed maintenance-free pure-lead spiral-cell battery | electrolyte absorbed (AGM)

Art.No.

## YTS-5.5L

Volt	12V
Capacity	75 Ah (c20)
CCR -18°C (EN)	975 A (EN)
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	325 x 165 x 238 mm
Weight	27,9 kg
Pos. of Terminal	0
Terminal	1
Base plate	-

### Usage




## Long-term stable performance


Particularly long-life battery that supplies consuming loads and small vehicles with a stable voltage characteristic during the entire discharge process. Our recommendation for anyone looking for a spill-proof, high-performance battery that can handle propulsion, powering and also starting.

- » **Pressed, wound plates** for reduced loss of active material and slower aging. Vibration-resistant.
- » **For medium cycle requirements.** Approx. 300 cycles at a discharge depth of up to 80%.
- » **Consistent performance quality throughout the discharge process.**
- » **Short charging times.**
- » **Larger plate surface area and reduced plate spacing** than grid plate batteries of the same case size **for higher performance.**
- » **6-volt and 12-volt versions.**


Size



Pos. of Terminal 0



Terminal 1

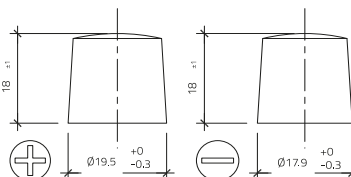

Base plate -

As of 01.09.2025