

CONSUMER BATTERY CHARGER



4Load chargers are primarily connected chargers with pulse maintenance. They ensure a maximum battery lifespan and are suitable for all types of lead batteries.

Thanks to the IU charging characteristic and an impulse charge, these devices are equally suitable for maintaining battery charge. All devices are splashproof and correspond to the protective system IP 65.

FITTINGS


- > Battery tongs
- > Clamping ears
- > 12 V plug (for cigarette lighter)
- > Bag

Item no.	Type	Capacity Amp.	Voltage	Scope	Dimensions mm L x B x H
CB-0.8	ChargeBox 0.8	0.8 Amp.	12 V	1 AH - 30 AH	140 x 60 x 50
CB-3.6	ChargeBox 3.6	3.6 Amp.	12 V	1 AH - 120 AH	182 x 60 x 42
CB-7.0	ChargeBox 7.0	7 Amp. / 3.5 Amp.	12 V / 24 V	10 AH - 230 AH	200 x 80 x 50






CHARGING PHASES & BULK CHARGING TIME

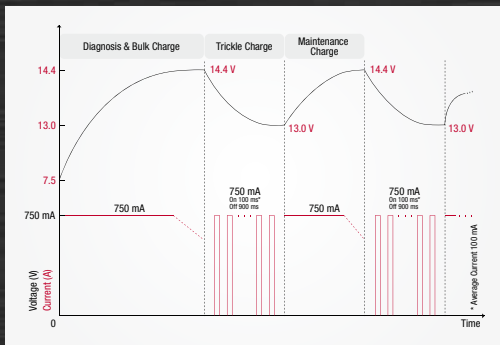

Battery Size (Ah)	For about 80 % Charge (hours) 12 V
1.2	4
2	7
10	30
12	37
20	60





CHARGING PHASES & BULK CHARGING TIME

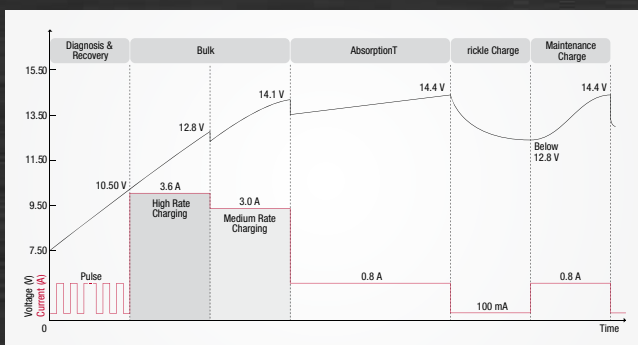

Battery Size (Ah)	Mode	For about 80 % Charge (hours) 12 V
2		2
8		8
20		4.5
60		14
100		23
120		28



CHARGING PHASES & BULK CHARGING TIME

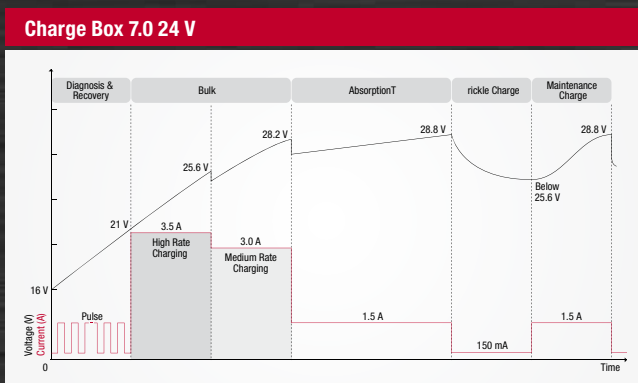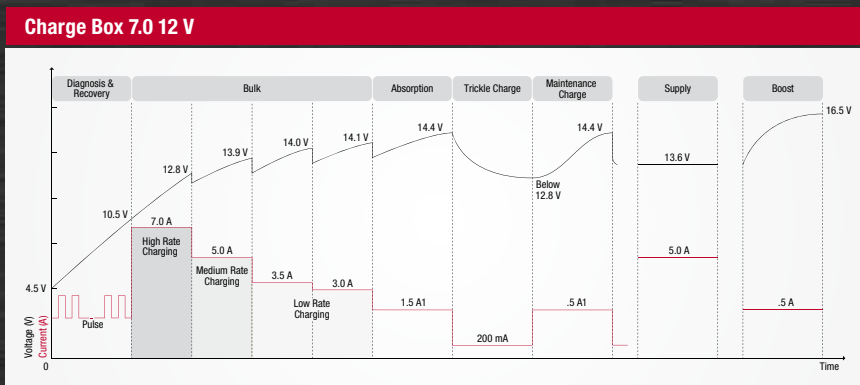

Battery Size (Ah)	For about 80 % Charge (hours)	
	12 V	24 V
14	2.5	4.9
60	7.5	15
100	12	24
120	15	30
230	29	